



EMP7
Particulate Emission
Monitor

What it Does

- EMP7 is a simple self contained 2-wire, particulate monitor with 4-20mA output designed to feed a PLC, display device such as AUD1 or Connect Network via Connect Access Card or Numeric Display, AUD1.
- Continuously monitors particulate flow, primarily emissions from process plants.
- Indicates condition and efficiency of cleaning system.
- Maintains absolute calibration.
- Models available for mg/m^3 (gr/ft^3) or mg/s (gr/s) following calibration to Iso-kinetic sample.
- Self Test Diagnostics including Statistical History, Run Time, Power Up and Optional Remote Diagnostics Reporting.

Product Description

The EMP7 utilises ISE technology. Each particle travelling through the process develops an electrical charge. As the particle passes or impacts with the sensing element, a current is induced which is processed in EMP7 by a method called Impulse Signature Extraction ("ISE").

ISE technology extracts the basic characteristics (the "signature") of the impulsive signals induced by individual particles in the gas stream. Since these characteristics are related to such things as the particle velocity, EMP7 is able to compute velocity as a parameter, and therefore to calculate the emission level as either mass flow rate or mass density as required. In addition, although ISE technology processes the entire signal from the sensing element, its algorithm effectively negates the potentially erroneous effects of the DC component of the signal, so ISE technology shares all the advantages of existing AC Triboelectric technology.

Made a reality by recent advances in low power digital signal processing, ISE technology is as significant a step forward now as the introduction of AC Triboelectric technology was in 1992.

Operational Range

- Suitable for a wide range of dust collection and materials handling operations and gas cleaning plants.
- Dust concentrations from 0.01mg/m^3 ($4 \times 10^{-6}\text{gr/ft}^3$).
- Accurate for most particle and particle characteristics.
- Insertion temperatures from -20°C to over 650°C (-4°F to over 1200°F) with additional hardware.
- Duct sizes from 50mm (2") to outlets over 10m (33ft).
- Suitable for most stack material. eg. brick, steel etc.

Benefits

- Detects all particles regardless of composition.
- Very sensitive due to ISE Technology Monitoring.
- No range switching or other adjustments.
- Calibration is constant.
- Extremely wide range of concentration and mass flow.
- Tolerates extremely high leakage of signal due to insulator bridging.
- Seamless interface into industrial controls systems, such as PLC.


Features

- Extremely wide, adjustment free range (0.01mg/m^3 to 1kg/m^3 or $4 \times 10^{-6}\text{gr/ft}^3$ to 400gr/ft^3).
- Simple 4-20mA, 2-wire output connection.
- Output is true mass density (mg/m^3) (gr/ft^3) or true mass flow rate (mg/s) (gr/s) depending on model selected.
- Full internal electrical isolation to prevent potential corruption due to ground potential differences.
- Resolution of 0.001mg/m^3 ($4 \times 10^{-7}\text{gr/ft}^3$).
- Logarithmic output for wide range displays, but also easily converted to linear.



AUD1 NUMERIC DISPLAY OR PLC (OPTIONAL)

EMP7

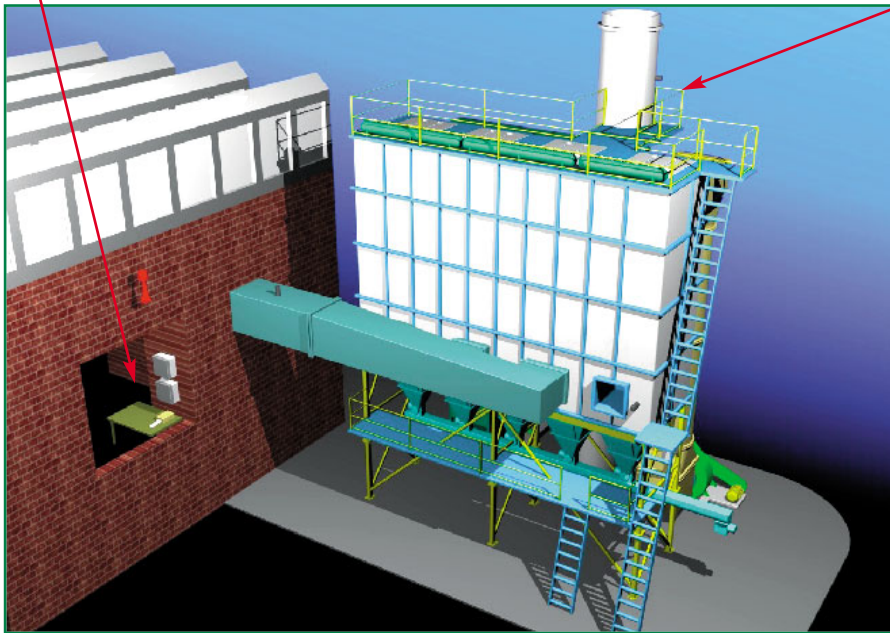

Technical Specifications

Functions

Monitoring Units

Calibrated:

mg/m³ (gr/ft³) user defined
automatic or mg/s (gr/s)

Diagnostics:

Statistical History. Run Time
Diagnostics. Power-Up
Diagnostics and optional
reporting

Outputs

Emission

Specification:

4-20mA

Function:

Log (concentration/mass flow)

Instrument Specifications

Enclosure Rating:

IP66/NEMA 4

Enclosure Size:

ø88 x 125mm high (ø3 1/2" x 5")
not including sensor length

Power Supply:

10-32VDC

Insertion Temp Range:

-20°C to 200°C
(-4°F to 392°F)

See supplier for higher
temperature options

Connection required
on duct:

1" BSPT socket

Sensing Element

Material:

316 Stainless steel (5mmOD x
300mm (standard cable length)
3/16" x 12")

Sensing Element

Options:

Solid rod, tubular, teflon coated,
multiple supports, cable type,
other lengths available

Air Purge Requirements:

Connection: 1/8" gas thread on
side of unit

Air Pressure: 400kPa (60psi) max

Air Consumption: 1.7-17m³/hr
(1-10cfm) pulsed

Electrical Specification
between Sensing Head
and Electrical Input:


2 core screened data cable: max
5000m (16,400ft)

Resolution:

0.001mg/m³ (0.4x10⁻⁷gr/ft³)

Range Stability:

+/-1% 4-20mA signal

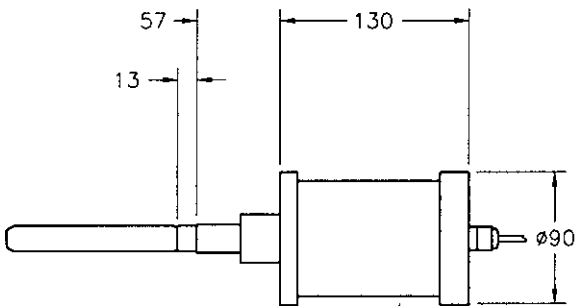

- EMP7 - 3100 : Basic Unit 80°C
- EMP7 - 3200 : Basic Unit 200°C
- EMP7 - 3250 : Velocity Compensation 200°C
- EMP7 - 3270 : Velocity Compensation + Diagnostics 200°C



Australia

Goyen Controls Co Pty Ltd
268 Milperra Road
Milperra
NSW 2214

Telephone: 61 2 9792 0201
Facsimile: 61 2 9771 5380

Queensland

Telephone: 61 7 3260 2161
Facsimile: 61 7 3260 2165

South Australia

Telephone: 61 2 9792 0201
Facsimile: 61 2 9771 5380

Victoria

Telephone: 61 3 9874 6655
Facsimile: 61 3 9874 1846

Western Australia

Telephone: 61 8 9302 8800
Facsimile: 61 8 9302 6500

Asia

Goyen Controls Co Pty Ltd
Shanghai Representative Office
2521 Zhao Feng World Trade Building
369 Jiang Su Road Shanghai 200050 CHINA
Telephone: 86 21 5239 8810
Facsimile: 86 21 5239 8812

Goyen Controls Co Pty Ltd
65-2 Jalan Mega Mendung
Kompleks Bandar 58200
Kuala Lumpur MALAYSIA
Telephone: 60 37 987 6839
Facsimile: 60 37 987 7839

USA

Goyen Valve Corporation
1195 Airport Road
Lakewood
New Jersey 08701 USA

Telephone: 1 732 364 7800
Facsimile: 1 732 364 1356

Europe

Goyen Controls Co UK Ltd
Unit 3B Beechwood
Chineham Business Park
Basingstoke, Hampshire, RG24 8WA
UNITED KINGDOM
Telephone: 44 1256 817 800
Facsimile: 44 1256 843 164

Tyco Umwelttechnik GmbH
Im Petersfeld 6
D-65624 Altendiez
GERMANY

Telephone: 49 6432 1001/1002
Facsimile: 49 6432 63810

Mecair S.r.l
Via per Cinisello 97
1-20054 Nova Milanese
Milano
ITALY
Telephone: 39 0362 3751
Facsimile: 39 0362 367 279