



GOYEN EMP6

PARTICULATE EMISSION MONITOR

WHAT IT DOES

- Continuously monitors for filter media leakage.
- Indicates and transmits relative condition of bags.
- Provides a 4–20 mA and 0–10V DC output designed to feed a PLC or other display device.
- Continuously monitors particulate flow, primarily emissions from process plants.
- Can be calibrated for mg/m³ (gr/ft³) or mg/s (gr/s) following calibration to Iso-kinetic sample.
- Push button and remote input to enable zero and span checks.
- Built in data logging capability for redundancy.
- Acts as a preventative maintenance tool.

PRODUCT DESCRIPTION

The EMP6 utilises AC Coupled Triboelectric technology. As particles travel through the process they develop a charge. This charge is transferred as the particle passes or impacts the sensing element. The resulting current is amplified, filtered, rectified and further filtered looking only at the AC component, to give a linear representation of the concentration or mass flow rate of the particles in the gas stream.

The reason for measuring the AC component is that compared to the DC component the electronics are more sensitive. The AC signal is substantially less affected by influences such as amplifier noise and process parameters, which includes the build-up of process dust on the sensing rod. The EMP6 remote sensing head totally filters out any 50 Hz or 60 Hz frequencies related to mains supply. The amplified signal is then sent via data cable to control unit for further processing and display.

OPERATIONAL RANGE

- Applicable for all types of outlet stack geometrical arrangements.
- Insertion temperatures up to 200°C (392°F), higher if required.
- Applicable to most particulate types
- For duct sizes from 50 mm (2") to outlets over 10 m (33 ft).
- Dust concentrations from 0.01 mg/m³ (4×10^{-6} gr/ft³).
- Suitable for a wide range of dust collection, gas cleaning and stack emissions.
- Suitable for most stack material, e.g. steel, brick etc.


BENEFITS

- Detects most particles regardless of composition.
- Very sensitive due to AC coupled technology.
- Can monitor extremely small particles, e.g. galvanising fume (~0.1 µm).
- Can be calibrated for large range of concentrations or mass flow rates 0.01 mg/m³ to 800 mg/m³ (4×10^{-6} gr/ft³ to 0.35 gr/ft³).

- A seamless interface with industry standard PLC, data logger or SCADA.
- Can dramatically reduce plant downtimes when interfaced into existing plant monitoring equipment.


FEATURES

- Proven AC Triboelectric technology.
- Relay time delay feature.
- Dual relay outputs.
- SD card slot for data logging (ASCII comma delimited).
- Digital two way communication to ensure product integrity.
- Sensitivity adjustment to aid in the elimination of bridging.
- Air purge port.
- Simple installation.
- Alarm level adjustment.
- ATEX II 3 D&G and MACT compliant.

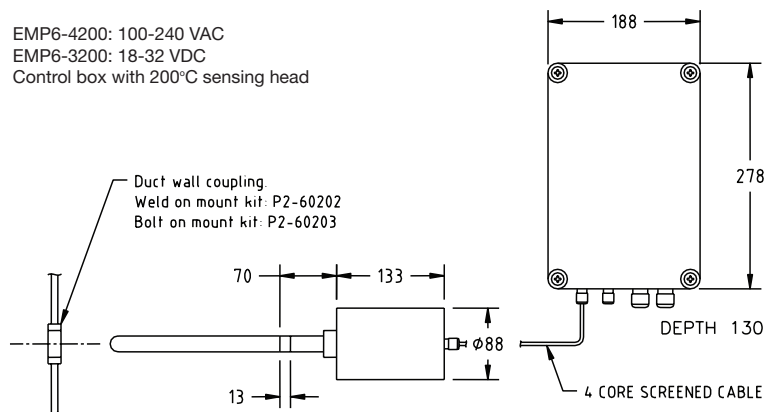

EMP6

PARTICULATE EMISSION MONITOR

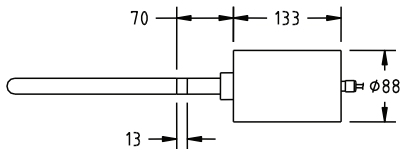

MODES OF OPERATION

The EMP6 is a continuous monitoring device for particulate emissions in a gas stream. The instrument is applied in an uncalibrated indicative mode in which levels are displayed and recorded in a relative scale (0–100%) or as a 4–20 mA scale which ensures that the signal output to PLC, SCADA system or data logger has the same value as that at the controller. The EMP6 gives a linear representation of either mg/m^3 or mg/s (gr/ft^3 or gr/s), when calibrated to gravimetric standards.

The EMP6 also has 2 relay modes – Normal and Failsafe.

Normal

- The alarm relay is de-energised when the EMP6 is powered up.

Failsafe

- The alarm relay is energised when the EMP6 is powered up.
- The alarm relay is de-energised when the EMP6 is in the alarm state.
- This mode is used to operate external alarm, indicating power failure.

Historical Logging of Data

For improved preventative maintenance and compliance with some permit agreements, it may be necessary to have all historical information charted for future reference. The EMP6 carries an SD card slot for data logging and recording internally through ASCII comma delimited format. The system is user settable through the system port (adjustments include averaging time, sample rate).

TECHNICAL SPECIFICATION

FUNCTIONS	
Bar graph:	Visual indication of emission density
Alarm time delay:	0–9 seconds in 1 second steps to prevent false alarms due to pulsing
Sensitivity:	Adjustable sensitivity within the sensing head (High, medium and low available)
OUTPUTS – PARTICULATE CONCENTRATION OR MASS FLOW	
Specification:	4–20 mA (1 K max) or 0–10V (10 K min)
Function:	Full range of particulate level
ALARM RELAY	
Specification:	8A Resistive/3.5A Inductive x 2
Function:	High High/High Level Alarm, High/Low Level Alarm, Low Low/Low Level Alarm
CONTROL UNIT	
Enclosure rating:	IP66/Nema 4, ATEX III 3 D&G
Enclosure size:	280 mm x 190 mm x 130 mm (254 mm x 164 mm Mounting)
Enclosure material:	Plastic Composite
Power supply:	100–240 V AC 50/60 Hz or 18–32 V DC
Bargraph display:	20 step LED
Temperature range:	–20°C to 60°C (–4°F to 140°F)
Sensing head:	One per control unit
SENSING HEAD	
Insertion temperature range:	P2–45200: –20°C to 200°C (–4°F to 392°F)
Connection required on duct:	1" BSPT socket
Enclosure temperature range:	–20°C to 60°C (–4°F to 140°F)
Enclosure rating:	IP66/NEMA4, ATEX II 3 D&G (other hazardous areas as option)
Enclosure material:	Aluminium
Sensing element material:	316 Stainless Steel
Sensing element options:	Solid rod, tubular, teflon coated, multiple supports, cable type, different lengths available
Air Purge Requirements:	Connection: 1/8" gas thread on side of unit Air Pressure: 400 kPa (60 psi) Max Air Consumption: 1.7–17 m ³ /hr (1–10 cfm) pulsed
Electrical Specification between Sensing Head and Control Unit:	4 core screened data cables: Beldon 9534 (or equivalent) max 200 m (656 ft)
Gain Switch:	Three positions (located on the Active Head): High (0–20 mg/m^3), Medium (0–150 mg/m^3) Low (0–1000 mg/m^3), Nominal only: depends on material velocity, geometry

AUSTRALIA

New South Wales – Head Office

268–292 Milperra Rd
Milperra NSW 2214
Phone: +61 1800 805 372
Fax: +61 1300 658 799

Queensland

Phone: +61 1800 805 372
Fax: +61 1300 658 799

South Australia

Phone: +61 1800 805 372
Fax: +61 1300 658 799

Victoria

Phone: +61 1800 805 372
Fax: +61 1300 658 799

Western Australia

Phone: +61 1800 805 372
Fax: +61 1300 658 799

Greenspan Technical Services

Coffs Harbour
21 Lawson Cres NSW 2450
Phone: +61 (0) 2 6651 9830
Fax: +61 (0) 2 6651 9831

Greenspan – MCE (RAINMAN)

70 Cleaver Terrace
Belmont, WA, 6104
Phone: +61 (0) 8 9477 1188
Fax: +61 (0) 8 9479 6727

EUROPE

United Kingdom

Unit 3B Beechwood
Chineham Business Park
Basingstoke, Hampshire
RG24 8WA United Kingdom
Phone: +44 1256 817 800
Fax: +44 1256 843 164

Germany

Tyco Umwelttechnik GmbH
Im Petersfeld 6
D-65624 Altendiez
Germany
Phone: +49 6432 1001/1002
Fax: +49 6432 63810

Italy

Mecair s.r.l
Via per Cinisello 97
Milano, Italy
Phone: +39 0362 3751
Fax: +39 0362 3667 279

ASIA

China

Shanghai Representative Office
1209 Greenland Business Centre
1258 Yu Yuan Rd
Shanghai 200050 China
Phone: +86 21 5239 8810
Fax: +86 21 5239 8812

Malaysia

73-M Jalan Mega Mendung
Kompleks Bandar, OUG,
58200 Kuala Lumpur
Malaysia
Phone: +60 3 7987 6839
Fax: +60 3 7987 7839

USA

Corporate Office & Parts Orders

Goyen Valve
1195 Airport Rd
Lakewood, NJ 08701
732-364-7800
Attn: Rob Demeter

CEMS & Process Gas Monitoring

Sales, Technical Support & Proposals
Gary Cacciatore
714-538-7212
gary.cacciatore@pentair.com

National Sales Manager

Jeff Harrington
270-783-9278
jeff.harrington@pentair.com

Northeast US/Eastern Canada

Joe Hanley
New Jersey
Ph: +1 732-674-3903
joe.hanley@pentair.com

Southeastern US

Bob Every
Georgia
Phone: +1 770-258-8533
bob.every@pentair.com

North Midwest

George Moeke
Cincinnati
Phone: +1 513-722-2763
george.moeke@pentair.com

South Midwest

Ken Johnson
Kansas City
Phone: +1 816-333-7333
ken.johnson1@pentair.com

Western North America

Dave Gager
Bayou Vista Texas
david.gager@pentair.com

Mexico/South America

Rosa DeStefano
Lakewood NJ
Phone: +1 732-364-7800
rosa.destefano@pentair.com

